

Closed Loop Navigation for Multiple Non - Holonomic Vehicles *

Savvas G. Loizou Kostas J. Kyriakopoulos

Control Systems Laboratory, Mechanical Eng. Dept
National Technical University of Athens, Greece
{sloizou, kkyria}@central.ntua.gr

Abstract

In this paper we incorporate dipolar potential fields used for nonholonomic navigation into a novel potential function designed for multi - robot navigation. The derived navigation function is suitable for navigation of multiple nonholonomic vehicles. A properly designed discontinuous feedback control law is applied to steer the nonholonomic vehicles. The derived closed form control scheme provides robust navigation with guaranteed collision avoidance and global convergence properties, as well as fast feedback, rendering the methodology particularly suitable for real time implementation. Collision avoidance and global convergence properties are verified through non - trivial computer simulations.

1 Introduction

Multiple robot navigation is a research area with an increasing research interest over the last decade [19, 11, 8, 18, 7]. In the last few years multi - robot navigation for Non - Holonomic vehicles is gaining increasing attention [14, 2, 4, 5].

Our main interest is to deduce global convergent control schemes with collision avoidance, suitable for real time implementation. Many researchers consider the local stabilization issues [20, 2, 3] without any deadlock resolution mechanism. There are also several attempts to attack the problem with neural nets [21, 5] and with fuzzy logic controllers [4]. In [14] a global convergent algorithm is pre-

sented for nonholonomic path planning, based on probabilistic roadmaps, but the methodology cannot be used for real time implementation due to its complexity.

Nonholonomic stabilization has attracted the attention of the control community over the years, due to the fact that nonholonomic systems do not satisfy the Brockett's necessary smooth feedback stabilization condition [1]. In this paper we address the problem of multiple nonholonomic robot navigation by constructing a potential function that can handle both multiple robot situations and provide feasible nonholonomic trajectories due to its dipolar structure.

The rest of the paper is organized as follows: Section 2 introduces the motivating problem. Section 3 outlines the concept of multiple robot navigation functions. Section 4 presents the discontinuous feedback control scheme. Section 5 presents simulation results for a number of non - trivial navigational tasks. Finally, section 6 summarizes the conclusions and indicates our current research directions.

2 Problem Statement

Consider the following system of m nonholonomic vehicles:

$$\begin{aligned}\dot{x}_i &= u_i \cdot \cos(\theta_i) \\ \dot{y}_i &= u_i \cdot \sin(\theta_i) \\ \dot{\theta}_i &= w_i\end{aligned}\tag{1}$$

with $i \in \{1 \dots m\}$. (x_i, y_i, θ_i) are the position and orientation of each robot, u_i and w_i are the translational and rotational velocities respectively.

*The authors want to acknowledge the contribution of the European Commission through contract IST-2001-33567-MICRON and IST-2001-32460-HYBRIDGE

The problem can be now stated as follows: “Given the nonholonomic system (1), derive a feedback kinematic control law that steers the system from any initial configuration to the goal configuration avoiding collisions. The environment is assumed perfectly known and stationary, while each robot acts as a potential obstacle to the others.”

3 Multi-Robot Navigation Functions

In a previous work [9] the authors presented an extension to the navigation function methodology with applications to multiple robot navigation. In this section we present how this novel class of potential functions can be enhanced with a dipolar structure [15] to provide trajectories suitable for nonholonomic navigation.

As it was shown in [9] the function: $\varphi = \frac{\gamma_a^k}{(\gamma_a^k + G)^{1/k}}$ proposed by [6] for single robot navigation, with a proper selection of G can be used for multiple robot navigation and can be made a navigation function by an appropriate choice of k. Our assumption that we have spherical robots and spherical obstacles does not constrain the generality of this work since it has been proven [6] that navigation properties are invariant under diffeomorphisms. Methods for constructing analytic diffeomorphisms are discussed in [13, 12] for point robots and in [16, 17] for rigid body robots.

Let us assume the following situation: We have m mobile robots, and their workspace $W \subset R^2$. Each robot R_i , $i = 1 \dots m$ occupies a disk in the workspace: $R_i = \{q \in R^2 : \|q - q_i\| \leq r_i\}$ where $q_i \in R^2$ is the center of the disk and r_i is the radius of the robot. The position vector of the robots is represented by $q = [q_1 \dots q_m]$. The orientation vector of the robots is represented by $\theta = [\theta_1 \dots \theta_m]$ where θ_i represents the orientation of each robot. The configuration of each robot is then represented by $p_i = [q_i \ \theta_i] \in R^2 \times (-\pi, \pi]$ and the configuration space C is spanned by $p = [q_1^T \dots q_m^T \ \theta_1 \dots \theta_m]^T$.

3.1 Mathematical Tools - Terminology

The robot proximity functions, a measure for the distance between two robots i and j , are defined by: $\beta_{i,j}(q) = q^T D_{i,j} q - (r_i + r_j)^2$, where r_i is the radius of the i 'th robot and $D_{i,j}$ is defined in [9]. We will use the term ‘**relation**’ to describe the possible collision schemes that can be defined in a multi robot - obstacles scene. The ‘**set of relations**’ between the members of a set can be defined as the set of all possible collision schemes between the members. A **binary relation** is a relation between two robots. Any relation can be expressed as a set of binary relations. A ‘**relation tree**’ is the set of robots-obstacles that form a linked team. Each *relation* may consist of more than one tree (figure 1). We will call the number of binary relations in a relation, the ‘**relation level**’.




Figure 1 : (a) One - tree relation, (b) Two tree relation

A **relation proximity function (RPF)** provides a measure of the distance between the robots involved in a relation. Each relation has its own *RPF*. An *RPF* assumes the value of zero whenever the related robots collide and increases wrt the distance of the related robots: $b_R = q^T \cdot P_R \cdot q - \sum_{\{i,j\} \in R} (r_i + r_j)^2$ where R is the set of binary relations (e.g. for the relation in figure (1.a) $R = \{\{A, B\}, \{A, C\}, \{B, C\}, \{D, E\}\}$) and $P_R = \sum_{\{i,j\} \in R} D_{i,j}$ is the **relation matrix** of

RPF. The gradient and Hessian of the *RPF* are: $\nabla b_R = 2P_R \cdot q$ and $\nabla^2 b_R = 2P_R$.

A **Relation Verification Function (RVF)** is defined by:

$$g_{R_j}(b_{R_j}, B_{R_j^C}) = b_{R_j} + \lambda \cdot b_{R_j} / (b_{R_j} + B_{R_j^C}^{1/h}) \quad (2)$$

where $\lambda, h > 0$, R_j^C is the complementary to R_j set of *relations* in the same level, j is an index number defining the relation in the level and $B_{R_j^C} = \prod_{k \in R_j^C} b_k$. An *RVF* is zero if a relation holds

while no other relation from the same level holds and has the properties: (a) $\lim_{x \rightarrow 0} \lim_{y \rightarrow 0} g_x(x, y) = \lambda$, (b) $\lim_{y \rightarrow 0} \lim_{x \rightarrow 0} g_x(x, y) = 0$.

Based on the above properties, in a robot proximity situation, one can verify that: if $(g_{R_j})_k = 0$ at some level k then $(g_{R_i})_h \neq 0$ for any level h and $i \neq j$ in level k . It should be noted hereby that since in the highest relation level only one relation exists, there will be no complementary relations and the RVF will be identical to the RPF e.g. $\lambda = 0$ for this relation.

We can now define $G = \prod_{L=1}^{n_L} \prod_{j=1}^{n_{R,L}} (g_{R_j})_L$, with n_L the number of levels and $n_{R,L}$ the number of relations in level L . Figure (2) demonstrates several types of relations of a four-member team.



Figure 2 : I, II are level 3; IV, V are level 4 and III is a level 5 relation

3.2 Dipolar Navigation Functions

To be able to produce a dipolar potential field, φ must be modified as follows:

$$\varphi = \frac{\gamma_d^k}{(\gamma_d^k + H_{nh} \cdot G)^{1/k}} \quad (3)$$

where H_{nh} has the form of a pseudo-obstacle. A possible selection of H_{nh} would be: $H_{nh} = \varepsilon_{nh} + \left(\prod_{i=1}^m \eta_{nh_i} \right)^\mu$ with $\eta_{nh_i} = \|(q - q_d) \cdot \mathbf{n}_{d,i}\|^2$, where $\mathbf{n}_{d,i} = [O_{1 \times 2(i-1)} \cos(\theta_{d,i}) \sin(\theta_{d,i}) O_{1 \times 2(m-i)}]^T$ and μ a tuning parameter. Subscript d denotes destination. Moreover $\gamma_d = \|p - p_d\|^2$, i.e. the angle is incorporated in the distance to the destination metric. The proposed modifications of the potential function does not affect its navigation properties [10], as long as the workspace is bounded and $\varepsilon_{nh} > \varepsilon(k)$.

4 Non - Holonomic Control

In the following analysis we will use V for denoting the navigation function instead of φ for notational consistency.

Define $M = \{1, \dots, m\}$ and $\Omega = P(M)$ where P denotes the power set operator. Assuming that Ω is an ordered set, let N_j denote the j 'th element of Ω where $j \in \{1, \dots, 2^m\}$. Then $N_j \subseteq M$ with $N_1 = \{\emptyset\}$ and $N_{2^m} = M$. We can now define: $\Delta_j = K_\theta \cdot \sum_{i \in \{M \setminus N_j\}} (V_{\theta_i} \cdot (\theta_{nh_i} - \theta_i)) -$

$K_u \sum_{i=1}^m (|V_{x_i} \cdot \cos(\theta_i) + V_{y_i} \cdot \sin(\theta_i)| \cdot Z_i) - K_\theta \cdot \sum_{i \in N_j} V_{\theta_i}^2$ with $Z_i = K_u \cdot (V_{x_i}^2 + V_{y_i}^2) + K_z \left((x_i - x_{d_i})^2 + (y_i - y_{d_i})^2 \right)$ where V_q denotes the derivative $\frac{\partial V}{\partial q}$ of V along q . Define

$H = \{j : \Delta_j < 0\}$ and $\rho = \left\{ j : \Delta_j = \max_{i \in H} (\Delta_i) \right\}$. We can now state the following:

Proposition 1. *The system (1) under the control law:*

$$\begin{aligned} \omega_i &= K_\theta \cdot (\theta_{d_i} - \theta_i), \quad i \in M \quad \Delta_1 \leq 0 \\ \omega_l &= K_\theta \cdot (\theta_{d_l} - \theta_l), \quad l \in \{N_p\}, \quad \Delta_1 > 0 \\ \omega_j &= -K_\theta \cdot V_{\theta_j}, \quad j \in \{M \setminus N_p\}, \quad \Delta_1 > 0 \end{aligned}$$

$$u_i = -\text{sgn}(V_{x_i} \cdot \cos(\theta_i) + V_{y_i} \cdot \sin(\theta_i)) \cdot Z_i, \quad i \in M$$

is globally asymptotically stable.

Proof. The navigation function V studied in the previous section serves as a Lyapunov function candidate. We will now examine the derivative of V along the trajectories of (1): $\dot{V} = \frac{\partial V}{\partial t} + \nabla V \cdot \dot{\mathbf{x}} = \nabla V \cdot \dot{\mathbf{x}}$ since $V = V(x)$ with $\dot{\mathbf{x}} = [\dot{x}_1 \ \dot{y}_1 \ \dot{\theta}_1 \ \dots \ \dot{x}_m \ \dot{y}_m \ \dot{\theta}_m]^T$ and $\nabla V = \left[\frac{\partial V}{\partial x_1} \ \frac{\partial V}{\partial y_1} \ \frac{\partial V}{\partial \theta_1} \ \dots \ \frac{\partial V}{\partial x_m} \ \frac{\partial V}{\partial y_m} \ \frac{\partial V}{\partial \theta_m} \right]^T$. Substituting we get:

$$\begin{aligned} \dot{V} &= \sum_{i=1}^m \left(\frac{\partial V}{\partial x_i} \dot{x}_i + \frac{\partial V}{\partial y_i} \dot{y}_i + \frac{\partial V}{\partial \theta_i} \dot{\theta}_i \right) = \\ &= \sum_{i=1}^m \left(u_i (V_{x_i} \cdot \cos(\theta_i) + V_{y_i} \cdot \sin(\theta_i)) + \dot{\theta}_i V_{\theta_i} \right) \end{aligned}$$

We are interested in establishing that $\dot{V} < 0$ almost everywhere, and the sets of points where $\dot{V} = 0$ except from the destination are not invariant. Applying the proposed controls, we get:

For $\Delta_1 \leq 0$ we have:

$$\omega_i = K_\theta \cdot (\theta_{d_i} - \theta_i), \quad i \in M$$

$$u_i = -\text{sgn}(V_{x_i} \cdot \cos(\theta_i) + V_{y_i} \cdot \sin(\theta_i)) \cdot Z_i, \quad i \in M$$

Then $\dot{V} = \Delta_1 \leq 0$. To proceed with the proof we will need the following lemma:

Lemma 1. *If $\Delta_1 > 0$ then $\exists i \in \{1, \dots, 2^m\} : \Delta_i < 0$*

Proof. If $\Delta_1 > 0$ then since: $-K_u \sum_{i=1}^m (|V_{x_i} \cdot \cos(\theta_i) + V_{y_i} \cdot \sin(\theta_i)| \cdot Z_i) \leq 0$

It must be $K_\theta \cdot \sum_{i=1}^m (V_{\theta_i} \cdot (\theta_{nh_i} - \theta_i)) > 0$ which means that there exists at least one k for which $V_{\theta_k} \neq 0$ and the term $-K_\theta \cdot \sum_{i \in N_j} V_{\theta_i}^2$ of some Δ_i will

be negative definite. For the worst case scenario, $\Delta_{2^m} < 0$ since $N_{2^m} = M$. \square

For $\Delta_1 > 0$ then there is at least one j for which $\Delta_j < 0$ as we deduced from (Lemma 1) and thus $\rho \neq \{\emptyset\}$. We choose $j = \rho$ because we want the maximum possible number of robots to follow the dipole generated Non-Holonomic trajectories. The rest will be doing a conflict avoidance manoeuvre. The controls in those cases take the form:

$$\begin{aligned} \omega_l &= K_\theta \cdot (\theta_{d_l} - \theta_l), \quad l \in \{N_p\}, \quad \Delta_1 > 0 \\ \omega_j &= -K_\theta \cdot V_{\theta_j}, \quad j \in \{M \setminus N_p\}, \quad \Delta_1 > 0 \end{aligned}$$

$$u_i = -\text{sgn}(V_{x_i} \cdot \cos(\theta_i) + V_{y_i} \cdot \sin(\theta_i)) \cdot Z_i, \quad i \in M$$

Then $\dot{V} = \Delta_\rho \leq 0$

Now let $E = \{\mathbf{x} : \dot{V}(\mathbf{x}) = 0\}$ and $E \supset S = \{x : \omega_i = u_i = 0, \forall i \in M\}$ is an invariant set. From the proposed control law, it can be seen that $u_i = 0, \forall i \in M$ only at the destination, and for all other configurations the controller provides a direction of movement. According to LaSalle's invariance principle, the trajectories of the system converge asymptotically to the largest invariant set, which is the destination configuration \square

5 Simulations

To verify the navigation properties of the methodology, we set up a simulation with four nonholonomic unicycles that are about to navigate from an initial to a final configuration, without hitting each other. The robots are placed at several initial configurations and the paths travelled are recorded and depicted in the figures that follow. The chosen configurations constitute non-trivial setups, since the straight paths connecting initial and final positions are obstructed by other robots.

In the first case (figure 5) the four robots were equally sized and positioned at: $[q_1^T \dots q_4^T] = [0.1732 - 0.1 - 0.1732 - 0.1 \ 0.0 \ 0.2 \ 0.0 \ 0.0]$ with angles $[\theta_1 \dots \theta_4] = [\pi/2 \ \pi \ 0 \ -\pi]$ and their destination configuration was set at: $[d q_1^T \dots d q_4^T] = [-0.1732 \ 0.1 \ 0.1732 \ 0.1 \ 0.0 \ -0.2 \ 0.0 \ 0.0]$ with $[d\theta_1 \dots d\theta_4] = [0 \ 0 \ 0 \ 0]$. Figure (5a) denotes the initial (R1...R4) and target (T1...T4) configurations of the four robots. Figures (5b-5d) depict the trajectories of the robots. As can be seen, the multirobot navigation function successfully resolves all the proximity situations and the nonholonomic controller successfully steers the system to its destination.

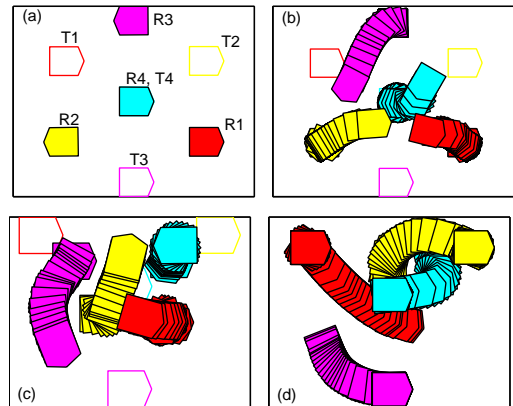


Figure 3 : (a) Initial Conf., (b,c) Intermediate Conf., (d) Intermediate and Final Configurations

In the next simulation, robots (R1...R3) were equally sized and robot R4 had half the radius of the rest. In this scenario, robots (R1...R3) are placed at their target configurations (figure 4a), obstructing robot (R4) to achieve its destination. As can be seen in this simulation (figures 4b-4e), the

robots (R1...R3), exhibit a cooperative behavior, departing momentarily from their destinations to allow robot R4 to manoeuvre to its destination.

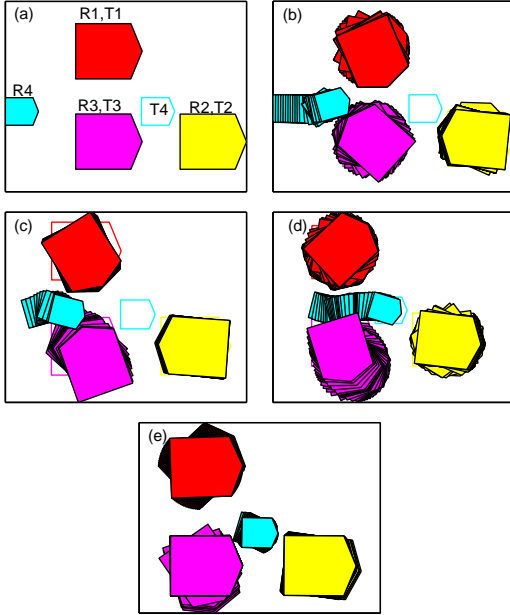


Figure 4 : (a) Initial Conf., (b,c,d) Intermediate Conf., (e) Intermediate and Final Configurations

In the last simulation (figure 5a), we have again equally sized robots, but the two of them (R3, R4) were placed at their destination configurations (T3, T4), while the other two (R1, R2) were placed at the destinations of each other (T2, T1). Again robots (R3, R4) are obstructing (R1, R2). As can be seen and in this simulation, the methodology succeeds to steer the robots to their destination and resolves the proximity situations encountered. The robots (R3, R4), in a cooperative manner depart momentarily from their destination configurations to allow (R1, R2) to reach their targets. In all simulations, after all robots reach their targets, the system remains stable to the destination configuration.

6 Conclusions - Issues for further research

In this paper we successfully merged two powerful concepts: Dipolar Potential Fields (DPF) for

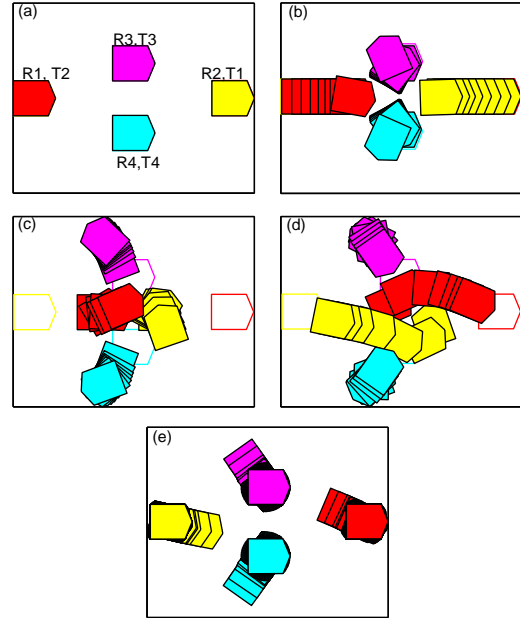


Figure 5 : (a) Initial Conf., (b,c,d) Intermediate Conf., (e) Intermediate and Final Configurations

nonholonomic navigation and Multirobot Navigation Functions (MNF). The derived Dipolar Multirobot Navigation Function (DMNF), along with the specially designed discontinuous feedback control law, provides guaranteed global convergence of the system. The methodology due its closed loop nature provides a robust navigation scheme with guaranteed collision avoidance and its global convergence properties guarantee that a solution will be found if one exists. The closed form control law and the analytic expression of the potential function and its derivatives, provides fast feedback and makes the methodology particularly suitable for real time implementation. The methodology can be easily applied to a three dimensional workspace and through proper transformations to arbitrarily shaped robots.

Current research directions are towards decentralized multiple robot navigation with limited workspace knowledge, limited vision capability, cooperation between mobile robots, formation control, as well as locomotion issues.

References

- [1] R. W. Brockett. Control theory and singular riemannian geometry. In *New Directions in Appl. Math.*, pages 11–27. Springer, 1981.
- [2] J. P. Desai and V. Kumar. Nonholonomic motion planning for multiple mobile manipulators. *Proc. of IEEE Int. Conf. on Robotics and Automation*, pages 3409–3414, 1997.
- [3] J. P. Desai, C. Wang, M. Zefran, and V. Kumar. Motion planning for multiple mobile manipulators. *Proc. of IEEE Int. Conf. on Rob. and Automation*, pages 2073–2078, 1996.
- [4] B. J. Driessen, J. D. Feddema, and K. S. Kwok. Decentralized fuzzy control of multiple nonholonomic vehicles. *Proc. of the American Control Conference*, pages 404–410, 1998.
- [5] E. Hu, S. Yang, and D. Chiu. A non-time based tracking controller for multiple nonholonomic mobile robots. *Proc. of IEEE Int. Conf. on Rob. and Autom.*, pages 3954–3959, 2002.
- [6] D. E. Koditschek and E. Rimon. Robot navigation functions on manifolds with boundary. *Advances Appl. Math.*, 11:412–442, 1990.
- [7] J. C. Latombe. *Robot Motion Planning*. Kluwer Academic Publishers, 1991.
- [8] Y.H. Liu et al. A practical algorithm for planning collision free coordinated motion of multiple mobile robots. *Proc of IEEE Int. Conf. on Robotics and Autom.*, pages 1427–1432, 1989.
- [9] S. G. Loizou and K. J. Kyriakopoulos. Closed loop navigation for multiple holonomic vehicles. *To Appear, Proc. of IEEE/RSJ Int. Conf. on Intelligent Robots and Systems*, 2002.
- [10] S. G. Loizou and K. J. Kyriakopoulos. Closed loop navigation for multiple non-holonomic vehicles. Tech. report, NTUA, <http://users.ntua.gr/sloizou/-academics/TechReports/TR0202.pdf>, 2002.
- [11] V. J. Lumelsky and K. R. Harinarayan. Decentralized motion planning for multiple mobile robots: The cocktail party model. *Journal of Autonomous Robots*, 4:121–135, 1997.
- [12] E. Rimon and D. E. Koditschek. The construction of analytic diffeomorphisms for exact robot navigation on star worlds. *Trans. of the American Mathematical Society*, 327(1):71–115, September 1991.
- [13] E. Rimon and D. E. Koditschek. Exact robot navigation using artificial potential functions. *IEEE Trans. on Robotics and Automation*, 8(5):501–518, 1992.
- [14] P. Svestka and M. H. Overmars. Coordinated motion planning for multiple car-like robots using probabilistic roadmaps. *Proc. of IEEE Int. Conf. on Robotics and Automation*, pages 1631–1636, 1995.
- [15] H. G. Tanner and K. J. Kyriakopoulos. Nonholonomic motion planning for mobile manipulators. *Proc of IEEE Int. Conf. on Robotics and Automation*, pages 1233–1238, 2000.
- [16] H. G. Tanner, S. G. Loizou, and K. J. Kyriakopoulos. Nonholonomic stabilization with collision avoidance for mobile robots. *Proc. of IEEE/RSJ Int. Conf. on Intelligent Robots and Systems*, pages 1220–1225, 2001.
- [17] H. G. Tanner, S. G. Loizou, and K. J. Kyriakopoulos. Nonholonomic navigation and control of cooperating mobile manipulators. *Accepted, IEEE Trans. on Robotics and Automation*, 2002.
- [18] E. Todt, G. Raush, and R. Suárez. Analysis and classification of multiple robot coordination methods. *Proc. of IEEE Int. Conf. on Rob. and Autom.*, pages 3158–3163, 2000.
- [19] P. Tournassoud. A strategy for obstacle avoidance and its applications to multi - robot systems. *Proc. of IEEE Int. Conf. on Robotics and Automation*, pages 1224–1229, 1986.
- [20] H. Yamaguchi and J. W. Burdick. Time-varying feedback control for nonholonomic mobile robots forming group formations. *Proc. of IEEE Int. Conf. on Decision and Control*, pages 4156–4163, 1998.
- [21] X. Yang and M. Meng. Real-time motion planning of car-like robots. *Proc. of IEEE/RSJ Int. Conf. on Intelligent Robots and Systems*, pages 1298–1303, 1999.